County Surveyor's Record, Benton County, Oregon.

SURVEY No. 8 67

MADE FOR Peter Rickard Wm Avery and Jas. Wilkison

39391 GLASS & PRUDHOMME, PRINTERS AND BOOKBINDERS, PORTLAND, OR.

Date of Survey Oct. 24. 1901

Begining at N E cor of Cl. No 53. of Tp. 13 S. R 6 W. T. Both bearing trees standing establish corner by the same Chainmen Emil Howard. Charley Clem Sworn

16 Thence East 16.00 chs. After South 21 links Thence East 24.72 Thence
40.72 North 21 links Set Islake for temp cor to Cl 53

Begin again at 1/4 sec cor bet secs 11 and 14

40.10 Thence South 89° 45' East 40.10 Thence S 89° 45' E 5.32 chs set stake in line between Rickard and Wilkison Thence South 89° 15' E.

75.19 intersect line between sections 7 and 12, 20 lks north of S section corner. Thence from cor of secs 12 and 13 on E ast

75.19½ boundary of Tp. 13 S. R 6 W. Re measure line bet secs 12 and 13 Set stake for permanent line between Rickard and Wilkison

Oct 25. 1901

From corner to secs 1, 2, 11 and 12 Tp 13 S R 6 W measured East 5.32 chans set flag in range of line between Cl 38 and Cl 53 also set flag 20 lks West of same Also set flag 20 lks West of South West corner of Claim 38 already established

Thence at a point E ast of Wilkison's house whence both flags can be seen I set compass in line between flags

Line ascertained to run S 0° 20' E Oct 25 4 P.M. Lat 44.3 N Dec 12° 07' E refraction 03'. Thence move compass East 20 links and run line between Wilkison and Avery also bet. Wilkison and Richard

Measured South 0° 20' E from to point of intersection of line (upon) bet sections 12 and 13 with West line of Cl. 38 18.12 ch deposited stone 8 x 12 x 24 for S W corner of claim No 38 Stone marked C. S. on North side. Thence from last mentioned stone

Measured North 0° 20' W 38.60 deposited stone 12 x 12 x 24 ins for corner to Richards and Avery's lands marked Stone C. S.

Begining again at S W cor of Claim 38. measured S 89° 30' E 19.28 deposited stone for cor Claim No. 54. This Stone 10 x 12 x 6 ins marked C. S.

Interested parties lines and corners established agreed upon

Recorded Apr 22. 1902

G. H. Waggoner County Surveyor

Sec 2 Sec 1
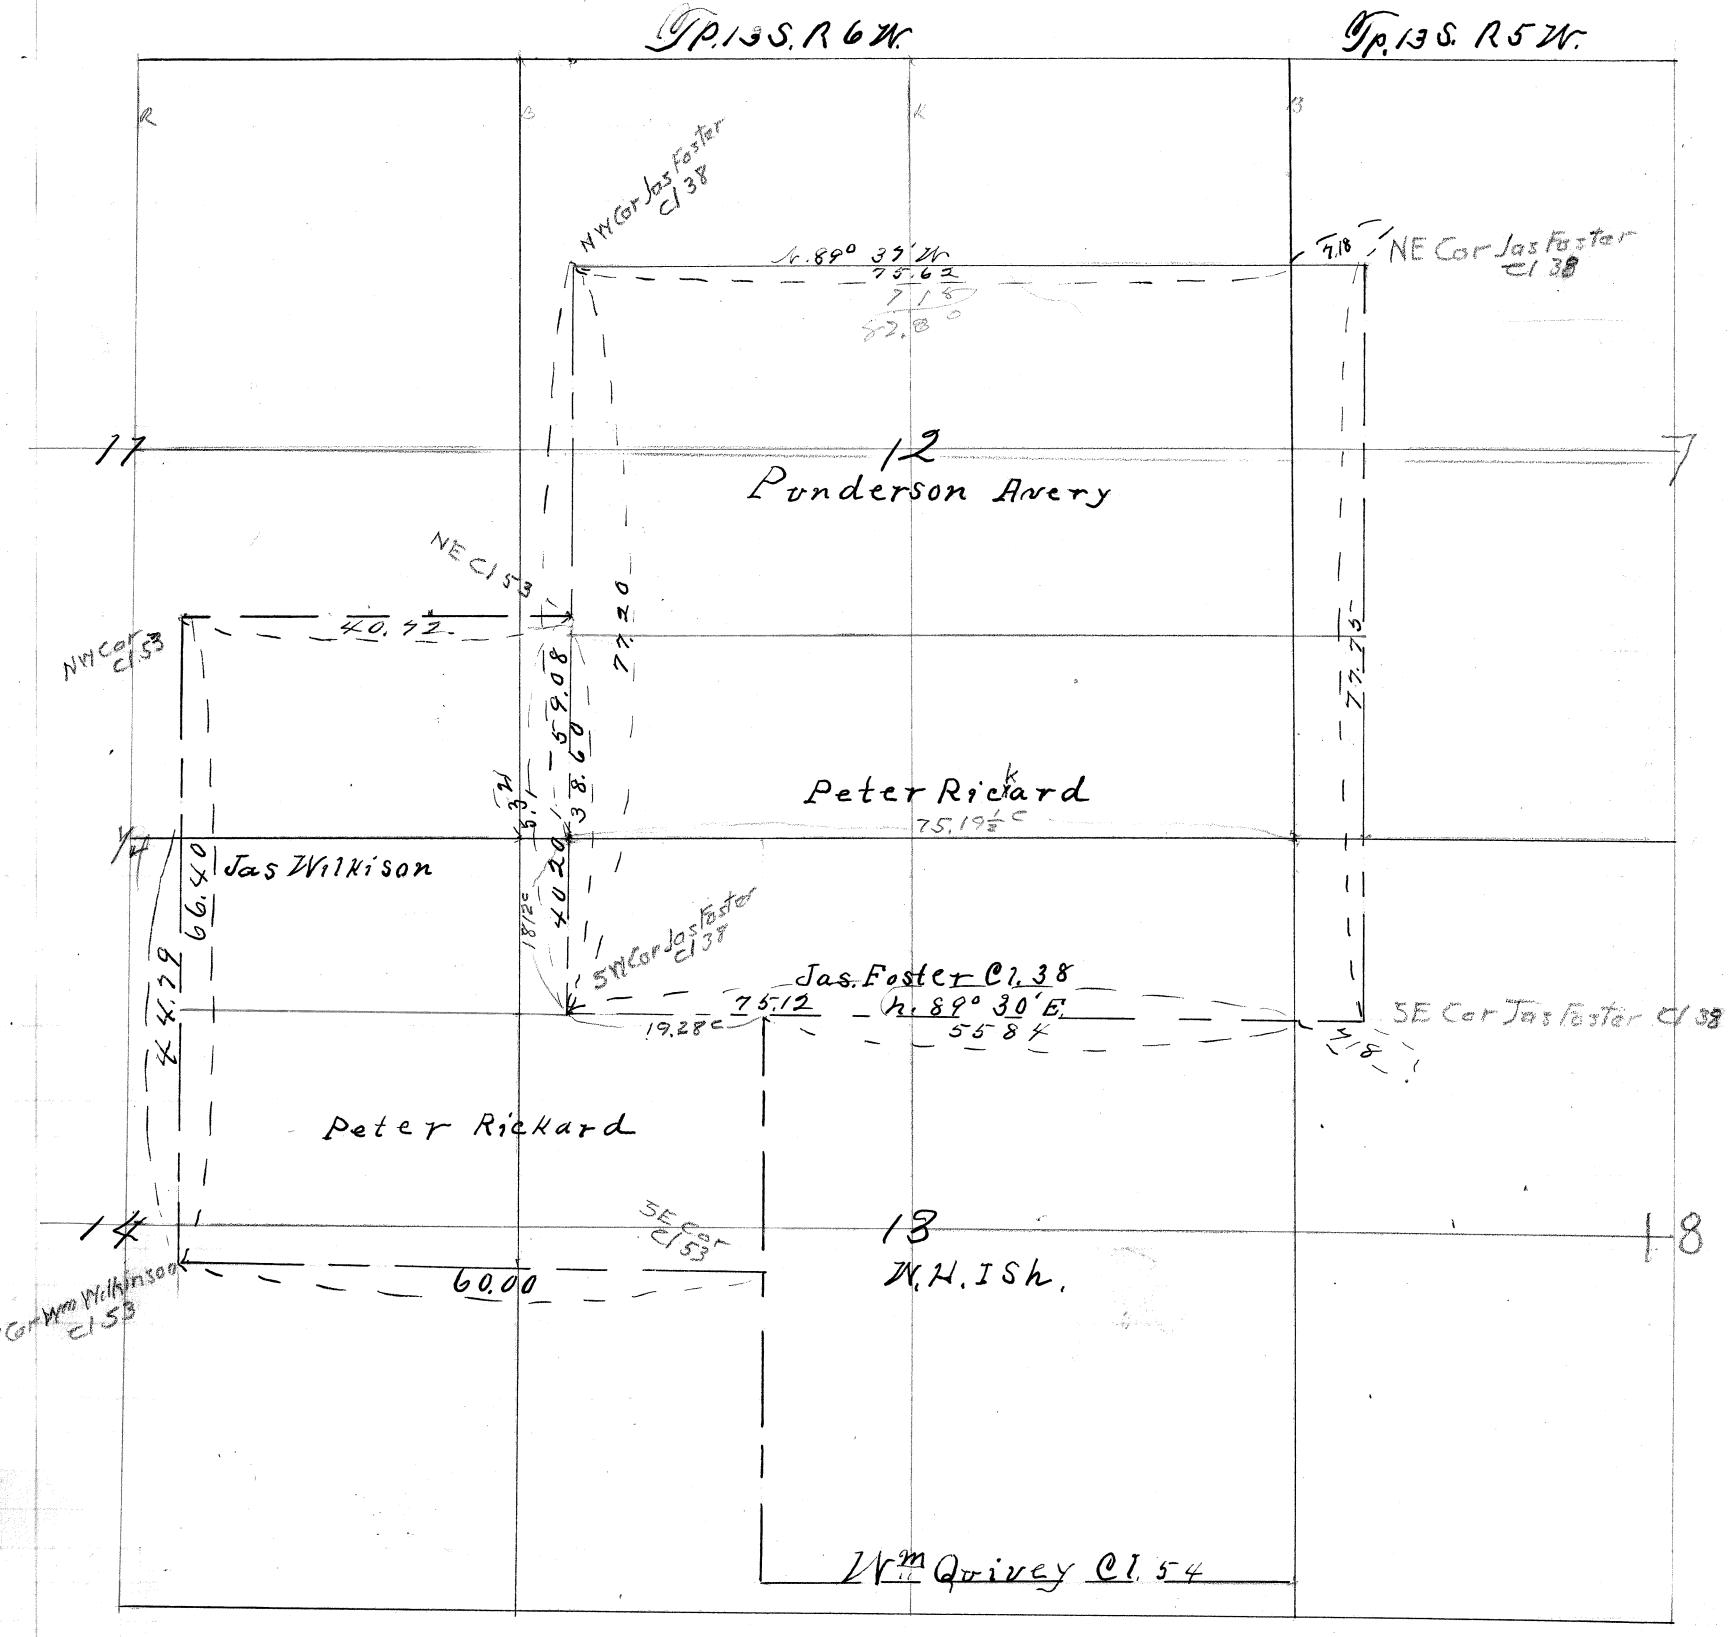
Scale 1" = 20c